

ULTRA HI-TEMP ADHESIVES

For Electronic, Metallurgical and Structural Applications

4000°F - RESBOND™ 904

Zirconia Adhesive

Resbond 904 extreme temperature adhesive surpasses the capabilities of most materials to provide 4000°F service.

Resbond 904 is a smooth, creamy paste that is easily applied and air dried to form a hard surface.

Resistant to molten metals, most chemicals and solvents, oxidizing and reducing atmospheres.

It is ideal for bonding and forming electrical, oxidation erosion and liquid metal resistant coatings for ceramics, graphite and thermocouple tubes.

Users Report:

- Bonded exhaust lines to a Thermogravimetric Analyzer's reaction chamber and used at 3400°F under a vacuum.
- Bonded Silica Cloth to furnace tubes for use at 2600°F in a Semi-conductor's clean room.
- Coated Aluminum Metal Panels on a Spacecraft and successfully protected the metal panels from High Intensity X-Ray radiation.

Applications include welding, brazing, bonding, electrical seals, thermocouple protection, instruments, high temp. facing for brick, electrical potting, liquid metal handling, etc.

5400°F - 931 Graphite Adhesive

99% Pure Graphite

Resbond 931 bonds Graphite or carbon components for use to 3000°C with 99% pure graphite. Just apply and cure at 250°F.

931 has excellent adhesion to graphite, and other porous surfaces, forming graphite to graphite bonds with strengths measuring in excess of 2500 psi.

It is electrically conductive and resistant to reducing atmospheres, most chemicals and solvents.

Resbond 931 is ideal for repairing broken or cracked graphite trays, components, fixtures, dies; filling and rebuilding crevices, cracks, worn areas and bonding graphite cloths, felts, boards, etc.

Users Report:

Resbond 931 repaired a 20" dia. x 24" high, cracked, induction heating susceptor. The susceptor heated uniformly after the repair. Resbond 931 Graphite adhesive doubled the life of this expensive part.



2500°F - 931C Ceramic Bonded Graphite

Resbond 931C has excellent adhesion to graphite, metals, glass, ceramics and non-porous parts. Its easy, just re-mix, apply and let dry. 931C cures at room temp. without heat.

Graphite Sealer

Resbond 931S Sealer can be used to reduce porosity, seal surfaces and increase the wear resistance and durability of graphite parts.

Users Report: Resbond 931S sealed the porous surface of graphite parts doubling the life of heat treating trays. 931S stopped dusting of graphite fixtures.

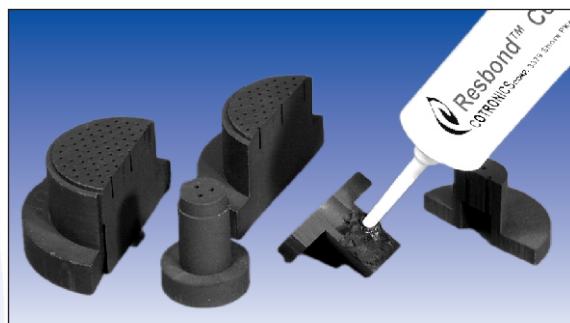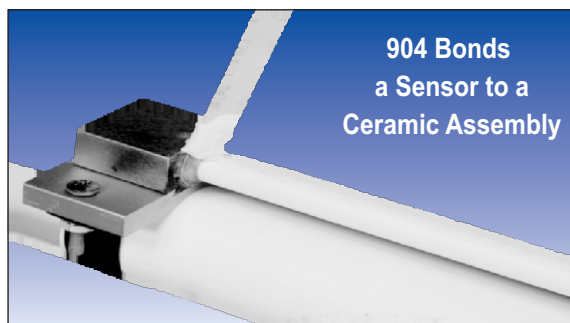

931 Forms a Pure Graphite bond in a Complex Graphite assembly

Resbond™	904	931	931C
Major Constituent	Zirconia	Graphite	Graphite
Maximum Temp	4000°F	5400°F*	2500°F*
Purity %	95	99	90
Thermal Expansion (x10 ⁻⁶ /°F)	4.10	4.10	4.10
Thermal Conductivity (BTU-in/Hr. Ft ² °F)	10	60	40
Compressive Strength (psi)	6000	3000	4200
Flex. Strength (psi)	3000	1500	1800
Dielectric Strength (volts/mil)	250	Conductive	Conductive
Color	Tan	Black	Black
Components	1	2	1
Mix Ratio	N/A	100/35	N/A
Cure @ R.T. (Hours)	2-4	1-2 @ 250	2-4
Consistency	Paint	Paste	Paste

*Inert Atmosphere

Cat No.

Cat No.	Size
Resbond 904-1.	Pint
Resbond 904-2.	Quart
Resbond 904-4.	Thinner (Pint)
Resbond 931-1.	Pint
Resbond 931-2.	Quart
Resbond 931-3.	Gallon
Resbond 931-4.	Thinner (Pint)
Resbond 931S-1	Sealer (Pint)
Resbond 931C-1	Pint
Resbond 931C-2	Quart
Resbond 931C-3	Thinner (Pint)