


# RESBOND™ 907TS THREADLOCKERS

## Viscosities and Strengths To Meet Your Toughest Sealant Needs

Use from -300°F to +2100°F

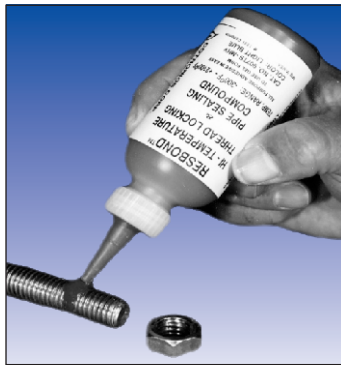

- **Easy to Use** No measuring. No mess. Will not run or drip while applying.
- **Economical** Just one bottle provides up to 2000 applications.
- **Room Temperature Cures** Saves time and money. No costly heat treatments.
- **High Temperature Stability** Will not soften or decompose at elevated temperatures.
- **High Bond Strength** Excellent Adhesion. Seals most metals and ceramic parts.
- **Electrical Resistance** Penetrates fine openings to provide electrical resistance.
- **Corrosion Resistance** Can be used with all conventional chemicals and solvents.

It's easy. No mixing required.

Just apply and let dry.

Resbond™ 907TS cures at room temperature.

Forms thermally stable, electrically insulating, chemically resistant bonds.

Packaged in convenient 4 oz. applicator bottles.

Will not run off or drip while applying.

Ideal for use on set screws, fasteners, bolts, pipes threads.

Removable with hand tools (under most conditions).



| Resbond™<br>907TS<br>2100°F                  | Use<br>For                         | Viscosity<br><br>(cps) | Shear<br>Strength<br><br>(psi) | Breaking<br>Torque<br><br>(inch-lbs.) | Gap<br>Fill<br><br>(in.) | Applications<br>Include   |
|--|------------------------------------|------------------------|--------------------------------|---------------------------------------|--------------------------|---|
| <b>Green</b><br>Low<br>Viscosity             | Penetrates<br>Fine<br>Openings     | 2,000                  | 370                            | 242                                   | 0.003                    | Small, Set, Adjustment Screws,<br>Fasteners and Instrumentation               |
| <b>Blue</b><br>Standard                      | General<br>Purpose                 | 4,000                  | 400                            | 270                                   | 0.005                    | Medium Screws, Nuts, Bolts,<br>Pipe Threads, Fittings, etc.                   |
| <b>Red</b><br>High<br>Strength               | Prevents<br>Vibration<br>Loosening | 3,000                  | 450                            | 276                                   | 0.010                    | Large Fasteners and Set Screws.<br>Pipe Threads, Studs, Bearings, etc.        |
| <b>Gold</b><br>High<br>Viscosity             | Fills Large<br>Gaps and<br>Grooves | 12,000                 | 500                            | 217                                   | 0.030                    | For difficult applications, Flanges,<br>Bolts, Pipe Threads, Large Nuts, etc. |
| <b>507TS</b><br><b>500°F</b><br>Epoxy Teflon | General<br>Purpose                 | 12,000                 | 12,000                         | 500                                   | 0.010                    | All purpose 2 component Epoxy<br>Teflon for difficult applications            |

| Cat. No.        | Description  | Price     |
|-----------------|--|-----------|
| 907TS-1.....    | 4 oz. Applicator Bottles (Specify Green, Blue, Red).....                   | 41.51/ea  |
| 907TS-1GLD..... | 4 oz. Applicator Bottle (Gold).....  | 46.82/ea  |
| 907TS-CP.....   | Case Pack - Twelve - 4 oz. Applicator Bottles.....                         | 425.99/ea |
| 907TS-TK.....   | Trial Evaluation Kit - Four - 1 oz. Bottles (Green, Blue, Red, Gold) ..... | 56.04     |
| 507TS-1.....    | Dispenser Kit .....  | 51.00     |