

# 2600°F ULTRA TEMP.™ TAPE AND CLOTH

## Stays Flexible at Hi-Temp.

ULTRA TEMP 391 is woven from Continuous Filament, High Alumina, Ceramic Fibers.

These unique fibers weave ceramic cloths, tapes and sleeving forming materials with flexibility and strength previously unavailable.

Ultra Temp. 391 is non-hygroscopic, non-porous, abrasion resistant and dimensionally stable.

Ultra Temp. 391 is resistant to molten metal sparks and splashes, most chemicals and solvents.

Provides unexcelled chemical and electrical resistance to 2600°F continuously and to 3300°F for short periods of time.

Use Tapes, Cloths and Sleeveings for hose coverings, furnace curtains, furnace belting, metal splash curtains, glass handling, gaskets, duct joints, metal filtration, etc.

Use 391 Pressure Sensitive Adhesive Backed Tapes for aiding in the installation and placement of tapes.

Use Thread for fabricating Ultra Temp 391 and other ceramic cloths.

### Tapes

Cat. No.	Thickness	Size	Price
391W-1A.....	0.02"	1" x 10'	168.31
391W-1.....	0.02"	1" x 20'	318.96
391W-2A.....	0.02"	2" x 10'	268.79
391W-2.....	0.02"	2" x 20'	526.38

### Adhesive Backed Tapes

Cat. No.	Thickness	Size	Price
391W-1APS..	0.02"	1" x 10'	213.91
391W-1PS....	0.02"	1" x 20'	342.02
391W-2APS..	0.02"	2" x 10'	298.94
391W-2PS....	0.02"	2" x 20'	566.04

### Cloth


Cat. No.	Thickness	Size	Price
391C-1.....	0.060"	12" x 5'	1,110.65
391C-1A.....	0.060"	12" x 2'	458.12
391C-2.....	0.060"	12" x 10'	2,191.20
391C-3.....	0.030"	30" x 25'	P.O.R.

### Thread

Cat. No.	Size	Price
391T-10.....	0.020" Dia. x 250'	125.48
391T-11.....	0.020" Dia. x 500'	242.09

### Lacing (Rope)

Cat. No.	Size	Price
391T12.....	0.060" Dia. x 50'	P.O.R.

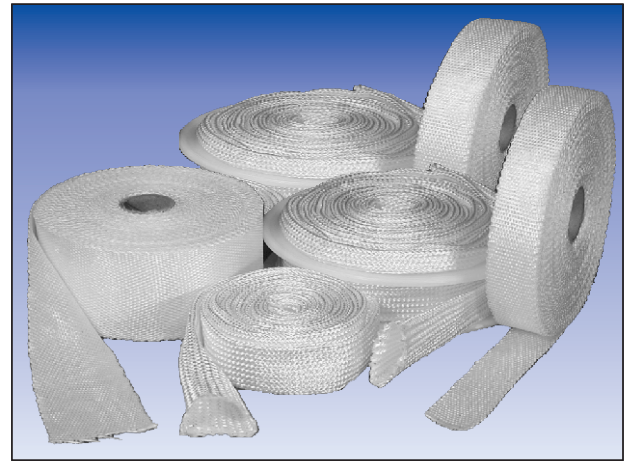

Tapes, Sleeveings, Cloths, Thread, etc.

391 ULTRA-TEMP	
Continuous Use Temp. °F	2600
Melting Point °F	3300
Dielectric Constant (10 <sup>8</sup> cps)	1.61
Dielectric Strength (volts/mil.)	500
Thermal Conductivity (BTU in / Hr. Ft <sup>2</sup> °F)	
500°F	0.45
1000°F	0.90
2000°F	1.60
<b>BASE FIBER:</b>	
Alumina & Refractory Oxides (%)	98
Tensile Strength (psi)	250,000
Modules of Elasticity (psi)	22 x 10 <sup>6</sup>
Diameter (microns)	11
Porosity (%)	0

### Sleeving

Cat. No.	ID	Wall Thickness	Length	Price
391T-0.....	1/16"	1/32"	25'	155.85
391T-1.....	1/8"	1/32"	25'	237.03
391T-2.....	1/4"	1/32"	15'	211.05
391T-3.....	1/2"	1/32"	10'	223.12
391T-5A.....	1"	1/32"	5'	212.98
391T-5.....	1"	1/32"	10'	406.39
391T-6.....	1.5"	1/32"	5'	296.96
391T-7.....	2"	1/32"	5'	386.26

Quantity Prices Available Upon Request