

# SPECIALTY HIGH TEMP. ADHESIVES

## Nylon Bonder - Sterilizable - Low Expansion

### 400°F - BOND-IT 7050

#### Super Nylon Bonder

**Bond-IT 7050** is an activated epoxy that incorporates adhesion promoters right into the epoxy's backbone structure permanently improving the epoxy's adhesion and bond strength.

Adheres to most plastic surfaces producing bonds that are, in many cases, stronger than the plastic substrates themselves.

Bonds combinations of dissimilar materials including metals, ceramics, plastics, glass, etc, and cures at room temperature.


#### Users Report:

- 7050 bonds nylon to aluminum housings with the bond strength required for a high performance lighting fixture.

Bond-IT is packaged in easy to use dispenser kits making it ideal to have in any shop, lab or production facility.

Bond-IT 7050-1 . . . . . Dispenser Kit . . . . . 24.95

Bond-IT 7050-2 . . . . . Pint kit . . . . . 74.95

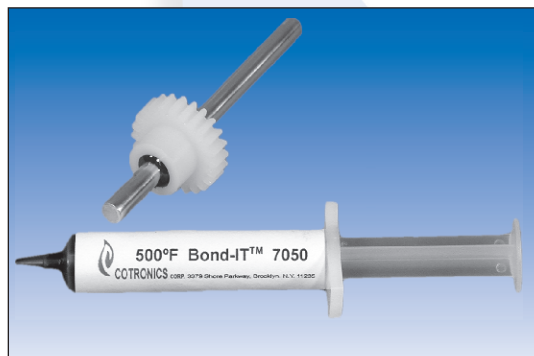

**Bond-IT 7050 Bonds Quartz Lamp into a Plastic Holder**

### 500°F - Resbond S5H13

#### Hot Sterilizable

**Resbond S5H13** is a unique epoxy that after a simple room temperature cure can assemble, bond and insulate stainless steel, metals, glass and ceramic components for use to 500°F.

Specially formulated to resist the severe conditions that are encountered during repeated hot sterilization as required for various medical applications.

It is resistant to most common chemicals and solvents.


#### Users Report:

- Resbond S5H13 seals Bi-Polar, Electro-Cauterizers and withstands thousands of successful sterilization cycles at 375°F.

S5H13 is commonly used for high performance bonding, assembling, potting, sealing, coatings and repairs in instruments, devices, equipment, etc.

Resbond S5H13. . . . . Pint kit . . . . . 79.95

Resbond S5H13. . . . . Gallon kit . . . . . 289.95

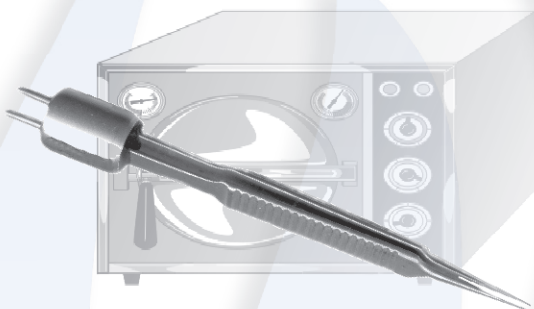

**Resbond S5H13 Seals Bi-Polar Electro-Cauterizers**

### 500°F - Duralco 4463

#### Low Expansion Adhesive & Potting

**Duralco 4463** is a low expansion, 500°F, room temperature curing adhesive and potting compound.

Bonds to most glass, ceramics, metals, plastics, etc.

Use this unique system for high performance bonding and encapsulation applications.

Low expansion is a must in many electronic, optical and fiberoptic applications. 4463 offers strength, high temperature stability, thermal shock resistance, chemical resistance and low shrinkage.

Duralco 4463-1 . . . . . ½ Pint kit . . . . . 69.95

Duralco 4463-2 . . . . . 1 Pint kit . . . . . 122.50

DURALCO	7050	S5H13	4463
Maximum Temp °F	400	500	500
Components - Color	2-Black	2-Black	2-Gray
Viscosity (cps)	20,000	20,000	15,000
Density (gm/cc)	1.3	1.9	1.5
Hardness (Shore 'D')	70	85	75
Tensile Strength (psi)	5,000	10,000	7000
Thermal Cond (BTU-in/ Hr. Ft <sup>2</sup> °F)	4.5	13	5.0
Thermal Expansion (x 10 <sup>-5</sup> /°C)	4.8	3.3	2.0
Dielectric Strength (volts/mil.)	400	500	600
Volume Resistivity (ohm-cm)	10 <sup>14</sup>	10 <sup>15</sup>	10 <sup>14</sup>
Heat Distortion (°C)	75	210	210
Elongation (%)	3	2	2
Thermal Stability (% 1000 hr. @ 200°C)	0.5	0.5	0.5
Shrinkage (% max)	0.8	0.2	0.5
Moisture Absorption (% 30 Days)	0.2	0.2	0.3
Mix Ratio (R/H)	100/10	100/13	100/6
Cure (Hr. @ Room Temp.)	4-16	16	4-16
Cure (Hr. @ High Temp.)	1-2 hrs. @ 200°F	1-2 hrs. @ 250°F	1-2 hrs. @ 250°F

*For Epox-EEZ Pre-Measured Kits  
see page 19*