

EPOX - EEZ™

High Performance Twin Packs

No Measuring - No Mixing - Just Squeeze To Apply Instant Mixing & Dispensing System

Convenient - Economical - Foolproof


Now, Cotronics' High Performance, High Temperature Epoxies are available in easy to use *Epoxy-Eez "Twin Pack Cartridges"*.

Just place the twin pack cartridge into the convenient, applicator gun, snap on a mixer tube and squeeze to apply.

The completely measured and fully mixed adhesive will cure at room temperature to provide up to 500°F service.


No more time consuming weighing and measuring.

Ideal for use in any high temperature application.

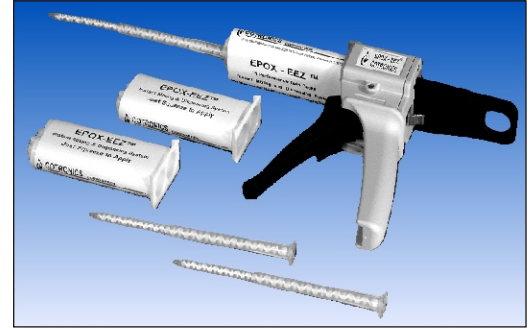

Applicator Gun With Disposable Cartridges & Mixer Sticks

EPOX-EEZ	All Purpose 4525N	Low Viscosity 4461N	Fast Set 4537N	Easy to Machine 4540N
Maximum Temp. °F	500	500	450	500
Hardness (Shore D)	80	75	60	80
Viscosity (cps)	40,000	800	10,000	30,000
Tensile Strength (psi)	10,000	9,500	6,000	10,000
Thermal Cond. (BTU in/°F hr. ft ²)	13	4	7	30
Dielectric Strength (volts/mil)	450	450	450	250
Volume Resistivity (ohm-cm)	10 ¹⁵	10 ¹³	10 ¹¹	10 ⁸
Shrinkage (% max.)	0.2	1	0.2	0.1
Elongation (%)	2	5	2	1.2
Moisture Absorption (% 30 days @ 50°C)	0.05	0.15	0.2	0.2
Thermal Stability (1000 hr. @ 200°F)	0.05	0.2	0.6	0.5
Color	Black	Amber	Blue	Grey
Cure (Hr. @ Room Temp.)	16	16	1-4	16
(Mins. @ 250 °F)	5	5	3	8

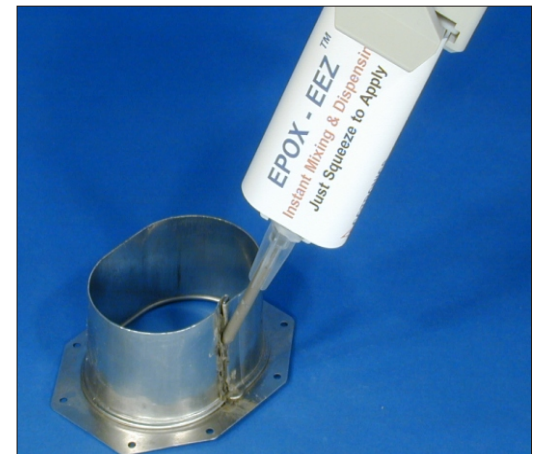

Adhesive Being Applied to Seal a Flange Joint

- | Cat. No. | Description |
|-----------------|--|
| ETSK | Starter Pack with Reusable Applicator Gun contains
1 Cartridge each of 4525N, 4461N, 4537N and 4540N |
| ETR | Epoxy-Eez Twin Packs Refills Package of 4 - 2 oz. Cartridges
Available in 4461N, 4525N, 4535N, 4537N, 4538N and 4540N.
Specify Grade Desired. See Product page for detailed data. |
| ETAG | Applicator Gun and Plunger |
| ETMT | Epoxy-Eez Disposable Mixer Tubes
Package of 10 |

Dispenser kits are available for most of Cotronics' systems upon request



COTRONICS CORPORATION