

2000°F - PUTTIES WON'T RUN OR SAG

Liquid Metals that Bond, Repair and Rebuild

Epoxy Like Materials for use to 2000 °F

These smooth, creamy putties offer the performance of Cotronics' high temperature, specialty formulations in easy to use systems, providing repair materials that are ideal for most applications.

No need for fixturing or clamps. These putties are easily applied with out running, dripping or sagging.

Just trowel on and cure at room temp. to repair, rebuild or assemble components.

These convenient Repair kits are ideal for small jobs, field use, in-house repairs and even production applications.

Epox-Eez™ 500°F Machinable Metallic Putties

These smooth, creamy putties cure at room temp. to form highly machinable, Aluminum or Stainless based composites usable to 500°F.

RK Repair Kits offer excellent adhesion, corrosion and chemical resistance.

They are ideal for patching leaky pipes, valves and fittings; repairing pumps, machinery and equipment; and rebuilding worn shafts, housings and linings.

Users Report: RK454 repairs, fills and patches parts prior to powder coating. Finished parts are free from blemishes caused by imperfections.

Commonly used in appliances, automotive, electronic, instrumentation, motors, chemical equipment, etc. A must for every shop and laboratory.


Applicator Kit (RK454) One Pound Kit (454B-1)

Now Available, Stainless Steel Based, Epoxy Repair Putty

Applicator Kit (RK456) One Pound Kit (456B-1)



Easy to Use Dispenser Kits

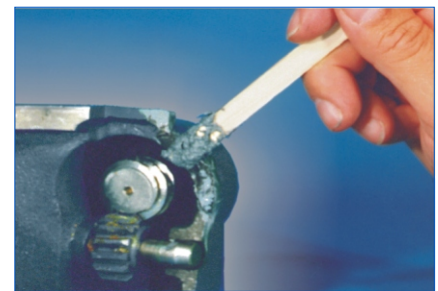

RK 454 Repairs Cast Iron Housing
for use to 500°F



7025 Rebuilds a Machine Part
for use to 1000°F



7032 Seals an Exhaust
System for use to 2000°F

Durabond™ 7025 New 1000°F Aluminum Putty

Durabond 7025 Corrosion Resistant Putty is specially formulated with active aluminum metal to provide excellent resistance to corrosion, erosion, most chemicals and solvents.

Just mix to a smooth, creamy putty and apply.

Durabond 7025 cures in 24 hours at room temp. or in 2 hours at 250°F to form a highly machinable, aluminum based composite usable to 1000°F.

Applications Include: Rebuilding worn or eroded areas, repairing cracks and voids; sealing and protecting process equipment, rebuilding worn pumps, impellers, valves, motors, heat exchanges, etc.

One Pound Kit (7025-1) Two Pound Kit (7025-2)

Durabond™ 7032 New 2000°F Stainless Putty

Now, a 2000°F Stainless Steel putty that will repair high temperature equipment.

A smooth creamy paste, just trowel on and cure at room temperature.

Will not run, drip or sag.

Safe to use. No flammable solvents. No harsh odors.

Hardening starts in just 60 minutes.

Durabond 7032 has excellent machinability, adhesion and heat resistance and is resistant to most chemicals and solvents.

Durabond 7032 is ideal for high temperature repairs, rebuilding, filling holes, plugging leaks in automotive, maintenance and industrial applications.

One Pound Kit (7032-1) Two Pound Kit (7032-2)

Quantity and Bulk prices on request.



COTRONICS CORPORATION

www.cotronics.com

(718) 646-7996 Fax (718) 646-3028 3379 Shore Parkway, Brooklyn, N.Y. 11235