

# HIGH TEMPERATURE SUPPLIES

## Coatings and Anti-Seize

### 1200°F - Duralco™ 6105 Stainless Brush on Coating


The corrosion resistance of Stainless Steel is now available in a easy to use, brush on coating.

Easy to use. Just re-mix, apply directly to clean surfaces and cure at room temperature. 6105 will form a continuous layer of stainless steel and protect the underlying metallic surfaces up to 1200°F.

Duralco™ 6105 Brush on Coating is resistant to most chemicals and solvents.

Commonly used for coating high temp. equipment, pipes, stacks, boilers, furnaces.

Duralco™ 6105, 1200°F, Stainless Steel Coating is ideal for large volume and production applications.



### Rescor™ 112 Boron Nitride Spray Coating and Lubricant


Boron Nitride has excellent electrical insulation, high thermal conductivity and is a superior high temp. lubricant. It is inert to most molten metals, glasses and salts.

This unique combination makes for an ideal high temp. lubricant, mold release and electrically resistant coating.

Use continuously to 1500°F in air and to 3600°F in inert atmospheres.

Now available in a convenient and fast drying (Non Ozone Depleting) spray formulation.

**Applications Include:** mold release, lubricant, barrier layer and as an anti-splatter compound in the metals, plastics, glass, composites and ceramic industries.

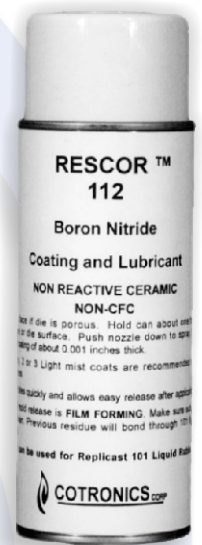

### 1000°F - Duralco™ 201SP No Galling ! No Pitting ! No Seizing !

Duralco™ 201SP combines the corrosion resistance of Aluminum with the high temperature protection of Cotronics' specialty silicone binders to form a 1000°F protective coating.

Easy to use. Just shake, spray and dry.

Duralco™ 201SP cures at room temperature to form an protective coating with excellent chemical, corrosion, solvent and high temperature resistance.

Duralco™ 201SP fights corrosion to 1000°F. It is ideal for coating high temperature equipment, pipes, stacks, boilers, heat exchanges, furnaces, etc.

Available in convenient to use 12 oz. spray cans. Just one can covers up to 30 square feet of metal.



### 2400°F - Duralco™ R450 Anti-Seize No Galling ! No Pitting ! No Seizing !

R-450 Anti-Seize prevents metal to metal contact and eliminates failures often caused by corrosion strong acids, alkalis and abrasion.

Allows for easy movement and disassembly.

Ideal thread lubricant for steel to stainless, brass to steel and dissimilar materials.

Use in power plants, chemical facilities, oil refineries, automotive, appliance, aerospace, etc.



Cat. No.	Description
Rescor™ 112-1.....	13 oz. Spray Can
Rescor™ 112-1C.....	Twelve - 13oz. Cans

Cat. No.	Description
Duralco™ 201SP-1.....	12 oz. Spray Can
201SP-1CP.....	Twelve - 12 oz. Cans
Duralco™ 6105-1.....	Brush-On Pint Brush
Duralco™ 6105-2.....	On Quart Brush- On
Duralco™ 6105-3.....	Gallon 4 oz. Brush Top
No Seize R-450-1.....	Can